


INSTALLATION INSTRUCTIONS

WATERLESS URINAL 6150.100, 6154.100, 6155.100



Before installing the Urinal, make sure drain line is clean and clear of debris.

Not recommended to install on any copper plumbing.
CAUTION: DO NOT use pipe dope or plumber's putty - will cause housing failure.
Warranty is void if plumber's putty or pipe dope is used for the housing connection.

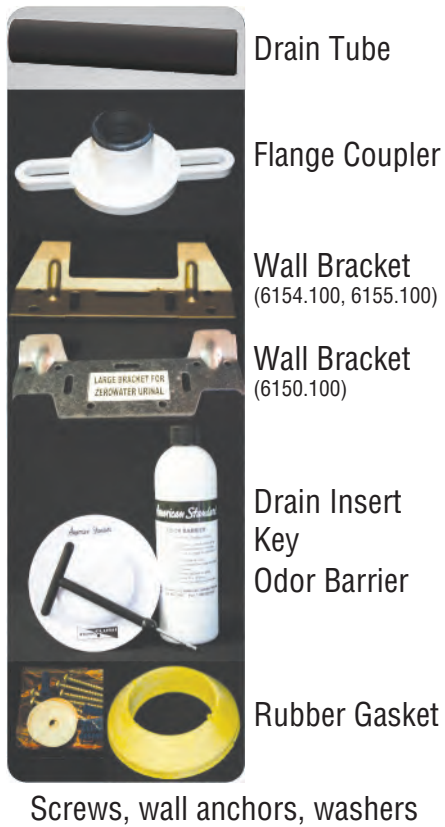


IF TEMPLATE NOT AVAILABLE:
 Hold the bracket flush with the back of the urinal. Measure from the bottom of the bracket to the middle of the drain pipe on the urinal. Using this measurement, measure from the middle of the drain pipe in the wall and mark the spot.




Install the wall bracket. Make sure the bracket is level and centered.



Remove old rubber gasket and clean flange and drain thoroughly. Install **NEW FLANGE COUPLER**, rubber gasket with longer part towards the wall and tighten bolts.

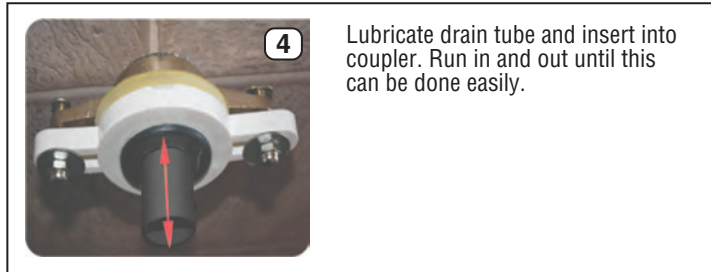

Lubricate drain tube and insert into coupler. Run in and out until this can be done easily.

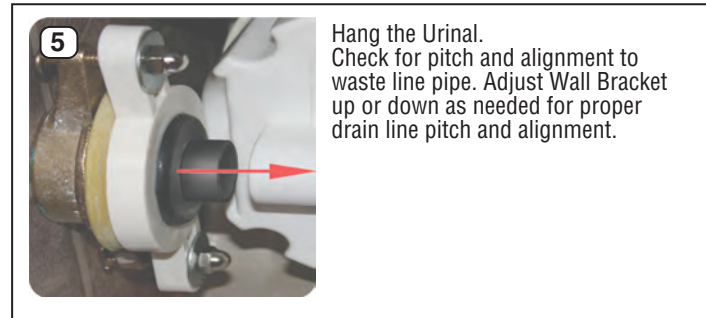

Hang the Urinal. Check for pitch and alignment to waste line pipe. Adjust Wall Bracket up or down as needed for proper drain line pitch and alignment.




Grab drain tube with a plier or similar tool and put into housing until it hits the stop about 1-1/4" in depth.

CAUTION: DO NOT use pipe dope or plumber's putty - will cause housing failure. Warranty is void if plumber's putty or pipe dope is used for the housing connection.

NEW CONSTRUCTION
Drain Must Have Standard Urinal Flange. (Not Supplied)

BEFORE REPLACEMENT URINAL INSTALLATION PLEASE

- Shut off and cap water supply.
- Remove existing hardware, caulk and grout.
- Remove all hidden traps and conventional siphons.
- SNAKE the sewer line thoroughly.
- Check for PROPER VENTING.
- ENSURE PROPER DRAIN PITCH to ensure water flows from the Urinal.

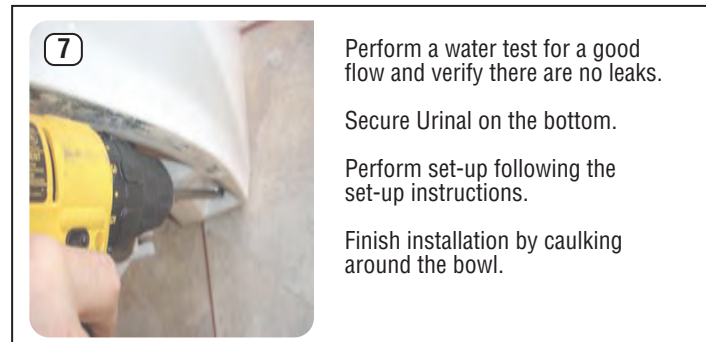

Perform a water test for a good flow and verify there are no leaks.
 Secure Urinal on the bottom.
 Perform set-up following the set-up instructions.
 Finish installation by caulking around the bowl.



6150.100
6154.100
6155.100


Liquid Odor Barrier Insert First Time Installation



1
Take a new Drain Insert and place it in the waste trap.



2
Press down on the drain insert until you feel and hear a slight popping sound. The insert must be tight.

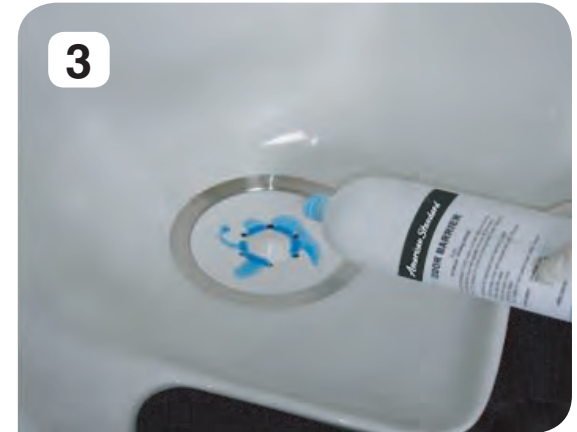

3
Pour about **30 oz. of water** over the Drain Insert. Then slowly pour the **entire contents of the Odor Barrier** onto the Drain Insert. Wipe clean. The American Standard Urinal is now ready for use.


Urinal Daily Cleaning Instructions



1
Remove debris.



2
Spray and wipe down with Cleaner.

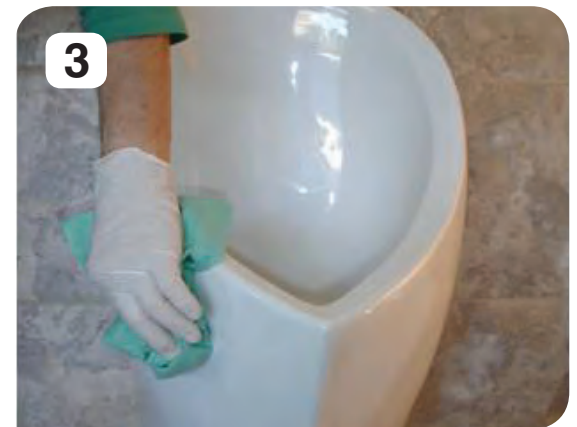

3
Wipe clean.



INSERT REPLACEMENT KIT 6156.100

American Standard

After approximately 15,000 uses there will be a small amount of Blue Odor Barrier Liquid on top of the Drain Insert. This indicates it is time to change out the Odor Barrier Liquid and the Drain Insert.



1
Screw the key into one of the holes of the Drain Insert and pull upward to remove. When insert is pulled the contents of the waste trap empties into the waste line.




2
Dispose the Drain Insert and key in a plastic bag.



3
Rinse the trap with two buckets of warm water. If necessary, use a small brush around the stainless steel ring. **Be careful not to scratch the ring.**



4
Take a new Drain Insert and place it in the waste trap.

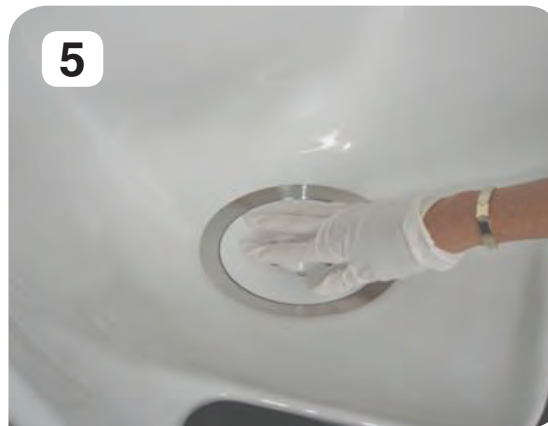

5
Press down on the Drain Insert until you feel and hear a slight popping sound. The insert must be tight.



6
Pour about **30 oz. of water** over the Drain Insert. Then slowly pour the **entire contents of the Odor Barrier** onto the Drain Insert. Wipe clean. The American Standard Urinal is now ready for use.



AS AMERICA, INC. ONE YEAR LIMITED WARRANTY

If inspection of this AS America, Inc. ("American Standard") plumbing product, within one year after its initial purchase, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for a similar model.

This limited warranty applies only to the original purchaser and installation of these products. In the event of a limited warranty claim, proof of purchase will be required—save sales receipt.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to insure local code compliance before installation.

This limited warranty is void if the product has been moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damages; if it was not installed in accordance with American Standard's instructions; or if it has been modified in a manner inconsistent with the product as shipped by American Standard.

American Standard's option to repair or exchange the product under this limited warranty does not cover any labor or other costs of removal or installation. IN NO EVENT WILL AMERICAN STANDARD BE LIABLE FOR THE COST OF REPAIR OR REPLACEMENT OF ANY INSTALLATION MATERIALS, INCLUDING BUT NOT LIMITED TO, TILES, MARBLE, ETC. American Standard will not be responsible for any other incidental or consequential damages attributable to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this limited warranty. This limited warranty does not cover any liability for consequential or incidental damages, all of which are hereby expressly disclaimed, or the extension beyond the duration of this limited warranty of any implied limited warranties, including those of merchantability or fitness for an intended purpose. (Some states or provinces do not allow the exclusion or limitation of implied limited warranties, so this exclusion may not apply to you.)

This limited warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or from province to province, in which case this limited warranty does not affect such statutory rights.

In the United States:

American Standard Brands
P.O. Box 6820
Piscataway, New Jersey 08855
Attention: Director of Customer Care
For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 442-1902
www.americanstandard.com

In Canada:

AS Canada, ULC
5900 Avebury Rd.
Mississauga, Ontario
Canada L5R 3M3
Toll Free: (800) 387-0369
www.americanstandard.ca

In Mexico:

American Standard B&K Mexico
S. de R.L. de C.V.
Via Morelos #330
Col. Santa Clara
Ecatepec 55540 Edo. Mexico
Toll Free: 01-800-839-1200
www.americanstandard.com.mx

THIS WARRANTY IS NOT TRANSFERABLE FROM ORIGINAL CONSUMER PURCHASER.