# **39662000** Left-Hand Trip Lever **39663000** Right-Hand Trip Lever EUROCUBE TWO-PIECE ELONGATED SINGLE FLUSH TOILET

### STANDARD SPECIFICATION:

- Elongated bowl design
- Made of vitreous china in Alpine White
- 12" (305 mm) rough-in
- Siphon action jetted bowl with smooth-sided, concealed trapway
- ADA Height
- Left and right hand trip lever options available
- High efficiency, low consumption 1.28 gpf/4.8 Lpf
- InfinaBright<sup>™</sup> surface coating reduces dirt and bacteria build-up ensuring the surface shines longer
- DreamClean<sup>™</sup> Rim scrubs the top to bottom with every flush
- 16-1/2" (419 mm) rim height
- Fully-glazed 2-1/8" (54 mm) trapway
- 3" (76 mm) flush valve
- Includes slow-close telescoping seat
- Color-matched bolt hole covers

## **COMPONENTS**:

- 39736000 Elongated Toilet Seat: Slow-Close,
- Top-mount, Easy Lift Off, Telescoping 39666000 - Tank - Left-Hand: 1.28 gpf 12" rough-in complete
- with coupling components and tank trim
- 39667000 Tank Right-Hand: 1.28 gpf 12" rough-in complete with coupling components and tank trim
- 39664000 ADA Height Elongated Bowl with Seat
- 39658000 Tank Cover
- 49131000 Plated Trip Lever Left-Hand in Chrome
- 49134000 Plated Trip Lever Right-Hand in Chrome

## **APPLICABLE CODES & STANDARDS:**

• Complete listing will be available by July 2020



- Watersense
- ADA
- CEC and CALGreen<sup>®</sup> Compliant

CALGreen<sup>\*</sup> is a registered trademark of California Building Standards Commission.

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.





# **39662000** Left-Hand Trip Lever **39663000** Right-Hand Trip Lever EUROCUBE TWO-PIECE ELONGATED SINGLE FLUSH TOILET




### **TECHNICAL DATA:**

### **DIMENSIONS:**

NOMINAL DIMENSIONS 29-3/8"x 14-15/16"x 30-13/16" (746 x 379 x 782 mm)

WATER SPOT 7-7/8" (200 mm) wide 9-1/4" (235 mm) length 5-1/2" (140 mm) distance to rim

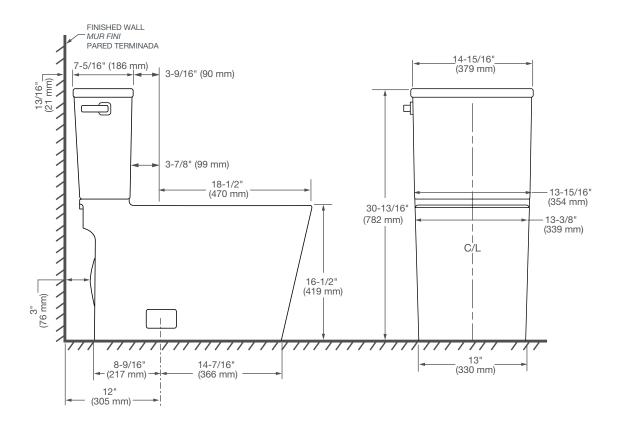

#### NOTES:

This toilet is designed to rough-in at a minimum dimension of 12" (305 mm) from finished wall to C/L of outlet. Supply not included with fixture and must be ordered separately. Dimensions shown for location of supply is suggested.

#### **IMPORTANT:**

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.