


Submitted Model No.:

Specific Features:

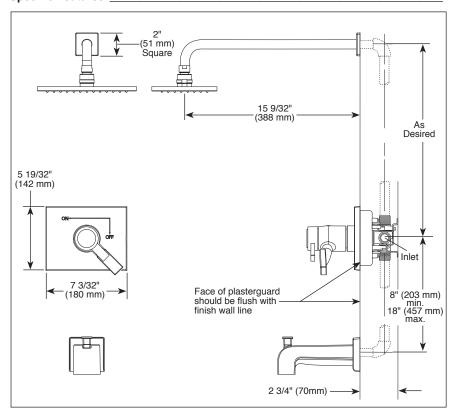


RP62955▲ (2.5 GPM) **RP91363**▲ (1.75 GPM) Touch-Clean[®] Raincan

8 21/32

(220 mm)

Full Spray





▲ Designate Proper Finish Suffix



see what Delta can do[.]

TUB AND SHOWER JETTED SHOWER™ TRIM

- Vero[®] Bath Collection TempAssure[®] Thermostatic
- Valve Only Trim (T17T053 Series)
- Shower Only Trim (T17T253 & T17T253-WE Series)
- Tub/Shower Trim (T17T453 & T17T453-WE Series)

STANDARD SPECIFICATIONS:

- TempAssure® 17T thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to ±3.6°F.
- Must also order Multi-Choice[®] Universal rough separately (R10000).
- Back-to-back installation capability.
- Lever volume control handle; temperature adjustment dial.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit rotation into hot water zone.
- 2.5 qpm @ 80 psi for standard models and 1.75 gpm @ 80 psi for models with -WE suffix.
- All parts are replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.
- Available extension kit (RP75136) adds up to 1 3/8" installation depth.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




5 45/64 (145 mm)

COMPLIES WITH:

ASME A112.18.1 / CSA B125.1

Indicates compliance to ICC/ANSI A117.1 - Valve control only.

PA WaterSense® (WE models only)



Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2017 Delta Faucet Company