


JASON NECTHER APPY


8328 MacArthur Dr. • North Little Rock, AR 72118


501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 www.jasoninternational.com

Integrity® Collection Specifications V4266

AirMasseur®

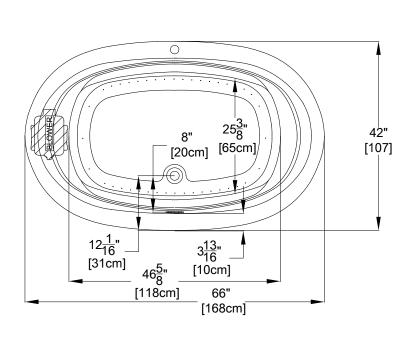

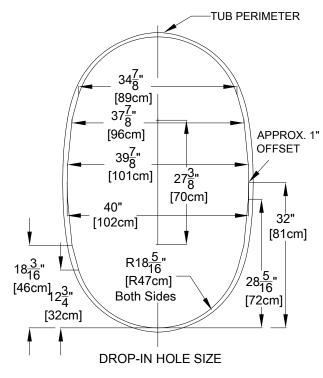

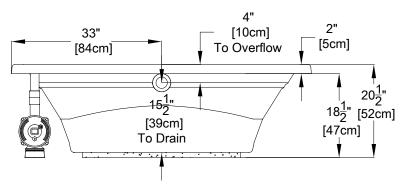

Patents received or pending.

Note: Dimensional Tolerances: ±1/4"

Air Switch Control



Includes a quiet, 120v, 3/4 HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the on/off and speed functions of the blower. Requires (1) 15A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form[™] pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

Drop-in-Hole Size:See DiagramOperating Capacity:43 Gal.Overflow Capacity:70 Gal.Floor Loading / sq.ft.:44.4 lbs.Carton Weight:116 lbs.Cube:39.7 ft.3