

CITÉ BF1188-110-100

PLUS: T375 Thermostatic Shower System SPECIFICATIONS



Components included

- BF1378-110 * : Rainhead and 90° wallarm
- 102850-110 * : 2-jet handshower
- 101323-110 * : Wallbar •
- 101620-110 * : 60" flexible and soft PVC hose
- BF1153-110 * : 3/4" Volume control valve and decorative trim (2x)
- BF1149-110 * : 3/4" Thermostatic valve and decorative trim •
- 102347-110 * : Wall outlet with volume control .
- 104777-110* : Adjustable body jets (4x)

Colors (Finishes)

Chrome : BF1188-110

Certifications

The specified model meets or exceeds the following standards;

- ASME A112.18.1 / CSA B125.1 ICC A117.1



See the following sheets for the technical features of each component.

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.



1355, 2^e Rue, Parc industriel Sainte-Marie (Québec) Canada G6E 1G9

T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418 -87-9089

KaliaStyle.com f 🔊 🕏 🛗



BF1378 PLUS: Rainhead and 90° Wallarm SPECIFICATIONS

Features

- Water 1/2" male inlet NPT
- Diameter of 254mm (10")
- Anti-scale system with soft sprays
- Adjustable orientation swivel
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : BF1378-110
- Brushed Nickel PVD : BF1378-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Canada G6E 1G9

Packaging

- **Dimensions**: 406mm x 324mm x 133mm (16" x 12 3/4" x 5 1/4")
- Volume: 0.62 cu ft (0.018 cu m)
- Total weight: 2.56 lb (1.16 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

www.KaliaStyle.com

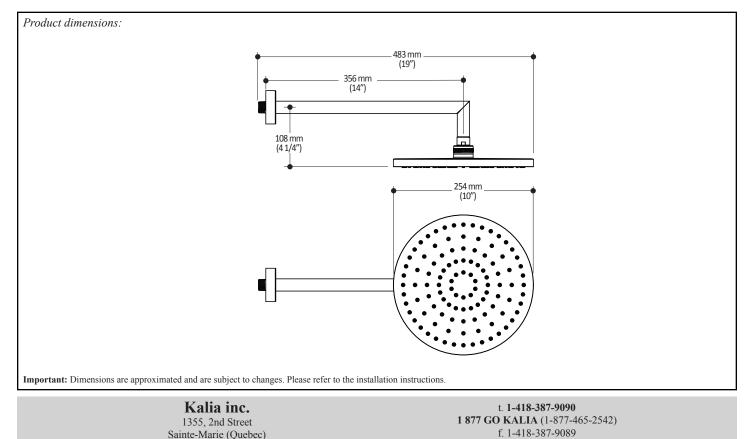



102850 PLUS: 2-Jet Handshower SPECIFICATIONS

Features

- Diameter of 121mm (4 3/4")
- Anti-scale system with soft sprays
- Water G1/2 male inlet
- 2 direct positions and 1 shared position
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 102850-110
- Brushed Nickel PVD : 102850-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Packaging

- **Dimensions**: 349mm x 171mm x 178mm (13 3/4" x 6 3/4" x 7")
- Volume: 0.375 cu ft (0.01 cu m)
- Total weight: 0.69 lb (0.315 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

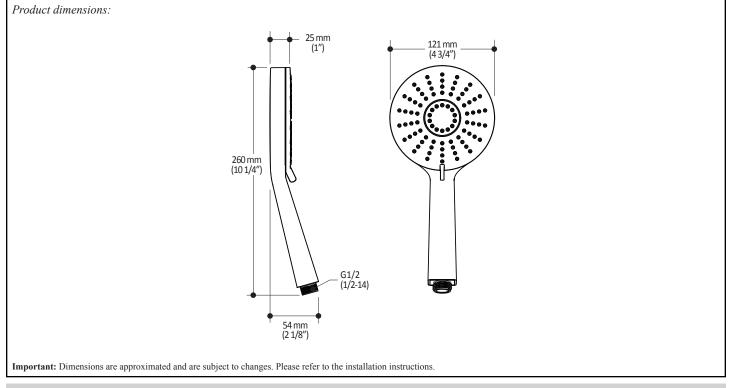



t. **1-418-387-9090 1 877 GO KALIA** (1-877-465-2542) f. 1-418-387-9089 www.KaliaStyle.com

BELLINOTM / CITÉTM



101323 Wallbar for Handshower

SPECIFICATIONS

Features

- Total height of 762mm (30")
- Locking system of 1/4 turn
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 101323-110
- Brushed Nickel PVD : 101323-120


Packaging


- Dimensions: 832mm x 152mm x 89mm (32 3/4" x 6" x 3 1/2")
- Volume: 0.40 cu ft (0.011 cu m)
- Total weight: 1.9 lb (0.86 kg)

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

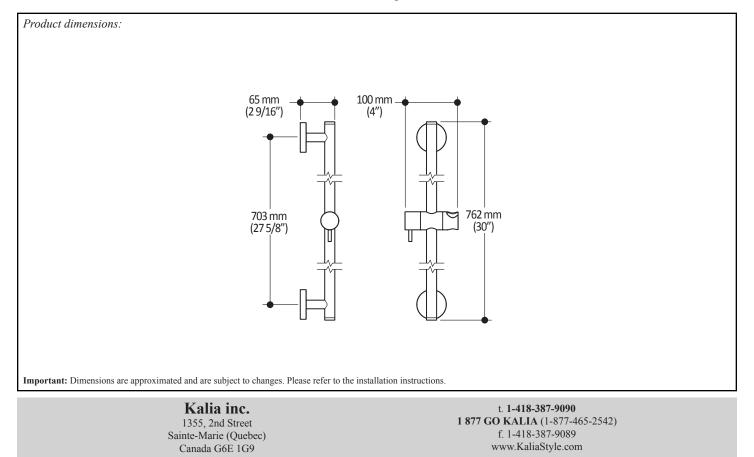





BF1153

3/4" Volume Control Valve and Decorative Trim

SPECIFICATIONS

Features

- No visible screw
- Water 3/4" female inlet NPT threaded
- Solid brass construction
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : BF1153-110
- Brushed Nickel PVD : BF1153-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Installation Notes

Packaging

•

(12" x 4 5/8" x 3 5/8")


Dimensions: 305mm x 117mm x 92mm

Volume: 0.12 cu ft (0.003 cu m)

Total weight: 2.2 lb (1.0 kg)

This product must be installed following the installation instructions provided.

WARRANTY

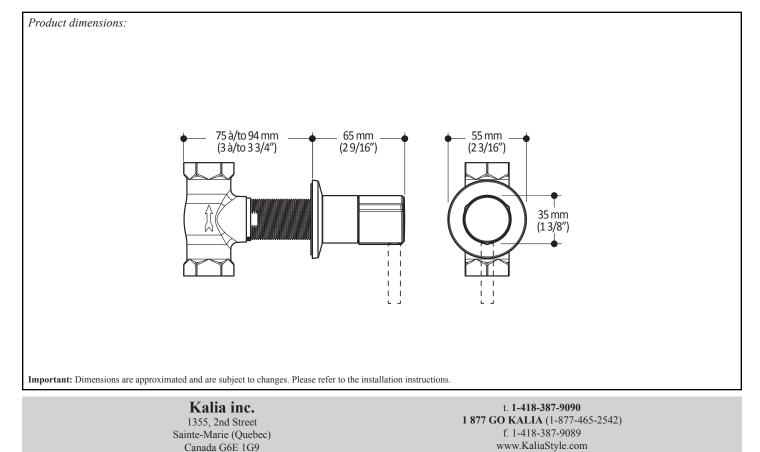





BF1149 3/4" Thermostatic Valve and Decorative Trim

SPECIFICATIONS

Features

- No visible screw
- Water 3/4" female inlet NPT threaded
- Shut-off valves included
- Solid brass construction
- Total adjustment of 19mm (3/4")
- Included support for better stability during installation
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : BF1149-110
- Brushed Nickel PVD : BF1149-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Packaging

- **Dimensions**: 362mm x 184mm x 191mm (14 1/4" x 7 1/4" x 7 1/2")
- Volume: 0.45 cu ft (0.013 cu m)
- Total weight: 5.79 lb (2.63 kg)

Maximum flow rate


55 liters/min. (14.5 gallons/min.) at 60 psi



Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

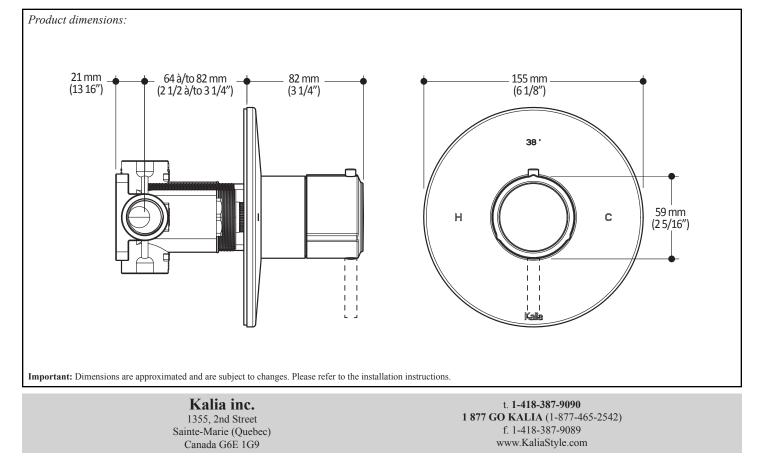

CITÉTM



102347 Wall Outlet with Volume Control SPECIFICATIONS

Features

- Water 1/2" female inlet NPT
- Water G1/2 male oulet
- Cartridge 3/4 with ceramic disc
- Solid brass construction
- Check valve included
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 102347-110
- Brushed Nickel PVD : 102347-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Packaging


- Dimensions: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- Total weight: 0.75 lb (0.34 kg)



Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

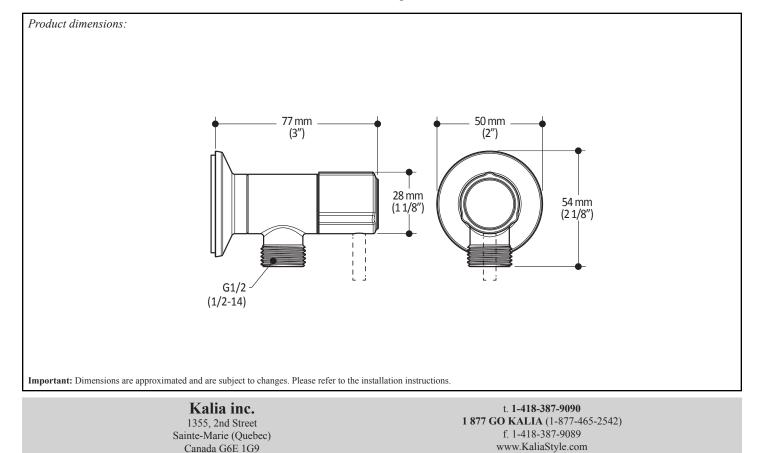



104777 Body jet SPECIFICATIONS

Features

- Male water inlet 1/2 NPT
- Solid brass water raceway
- 20° adjustable spray head
- Slim profile
- 23 mm (7/8") installation adjustment
- Round or square escutcheon trim finish
- Reccessed box included

Colors (Finishes)

• Chrome : 104777-110

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1




Packaging

- Dimensions: 370 mm x 190 mm x 205 mm (14 5/8" x 7 1/2" x 8 1/8")
- Volume: 0.014 m³ (0.51 pi³)
- Total weight: 0.66 kg (1.45 lb)

Maximum flow rate

3.8 litres/min. (1 gallons/min.) à 60 psi



Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

