MOEN[®]

DESCRIPTION

- · Solid brass construction
- Chrome finish
- 1/2" IPS connections
- Solid brass waterways

OPERATION

- 6" lever handle w/red and blue temperature indicators
- Temperature controlled through 110° arc of handle

FLOW

 Aerator is limited to 2.2 gpm max (8.3 L/min) - 8416 0.5 gpm - 8416F05

CARTRIDGE

- 121549 ceramic disc cartridge
- Nonmetallic/nonferrous and ceramic material


STANDARDS

- Third party certified to ASME A112.18./CSA B125.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

WARRANTY

· Warranted for 5 years against material or manufacturing defects


Specifications



Single-Handle Lavatory Faucet

Less Drain Model: 8416

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3 HOLES, 1" MIN. DIA.

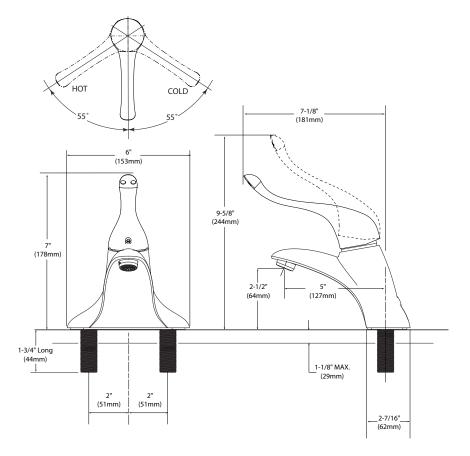

CRITICAL DIMENSIONS

(DO NOT SCALE)

PC13788

11(0/2012 Released 00