



COMMERCIAL

Specifications

DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve
- Contains: hand-held shower with non-positive shut off button, 69" metal hose and mounting hardware, 30" slide bar, drop ell, vacuum breaker
- **Slide bar is NOT DESIGNED TO BE A GRAB BAR**
- Applicable components are supplied with vandal resistant screws
- Quick cleaning rubber nozzles

OPERATION

- Temperature valve both has ADA compliant lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock, and the maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to ± 3.6°
- Single function spray pattern
- Easy to operate non-positive shut off button (reduces the flow of water to a trickle)

FLOW

- 1.5 gpm (5.7 L/min) Max at 80 psi, 1.1 gpm (4.2 L/min) Min. at 45 psi hand-held shower head

CARTRIDGE

- Pair with a brass Posi-Temp rough-in valve:
- 8370HD*: 1/2" CC connection without integral stops
- 8371HD*: 1/2" CC connection with integral stops
- 8372HD*: 1/2" IPS connection with integral stops
- 8373HD*: 1/2" PEX connection with integral stops
- 8374HD*: 1/2" CPVC connection with integral stops,
- *Includes the 1222HD Brass Posi-Temp Cartridge
- Nonmetallic/nonferrous and stainless steel materials
- Also requires the 3360 3 function transfer rough-in valve
- Accommodates back to back installations


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

- **ADA** for lever handle

WARRANTY


- Warranted for 5 years against material or manufacturing defects

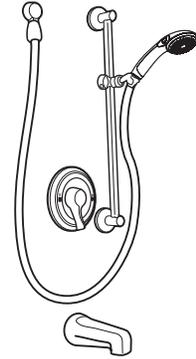

Single-Handle Posi-Temp® Handheld Shower System



EP Models Only

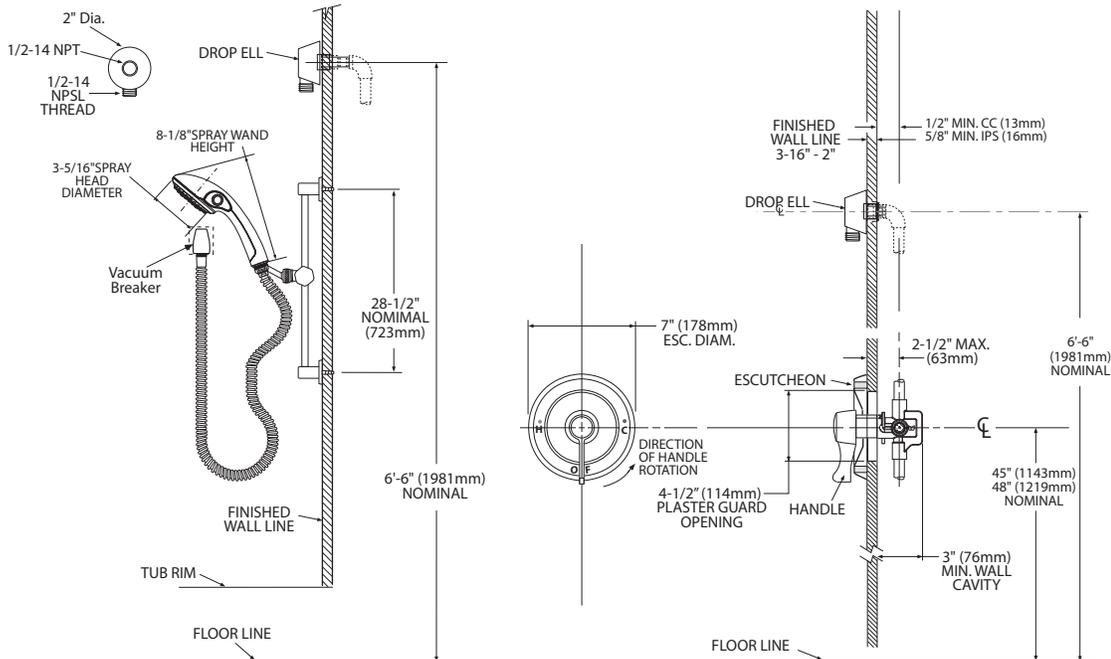

* Refer to (ADAAG) guidelines or local codes for proper ADA installation.

CRITICAL DIMENSIONS

(DO NOT SCALE)