


MONTERREY®


TWO-HANDLE TOP-MOUNT KITCHEN FAUCET WITH TUBULAR BRASS SWIVEL SPOUT



6408.171 Shown

MODEL NUMBER:

- 6408.141 Top Mount Faucet with Swivel Spout 8" Tubular brass swivel spout. Vandal-resistant metal lever handles with red/blue indexes. 1.5 gpm pressure compensating aerator. Color matched spray.
- ☐ 6408.140 Top Mount Faucet with Swivel Spout Same as above, less spray.
- 6408.171 Top Mount Faucet with Swivel Spout 8" Tubular brass swivel spout. Vandal-resistant metal wrist blade handles with red/blue indexes. 1.5 gpm pressure compensating aerator. Color matched spray.
- Game as above, less spray.

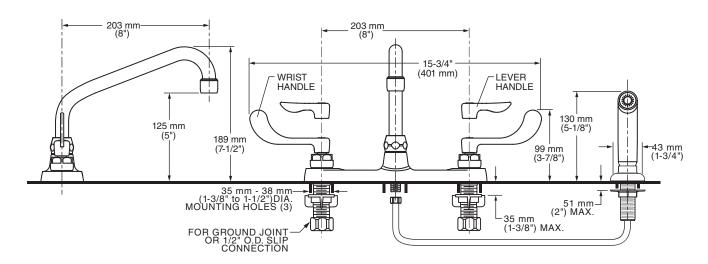

GENERAL DESCRIPTION:

Durable cast brass construction. 1/4 turn ceramic disc valve cartridges. 1/2" male threaded inlet shanks with shank nuts and brass coupling nuts. Tubular brass swivel spout with 8" reach. Choice of vandal-resistant wrist blade or lever handle with blue & red color indexes. 1.5 gpm/5.7 L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assure a lifetime of drip-free performance.

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range

Tubular Swivel Spout

Solid Brass Construction: Durable. Excellent in high use applications. Ideal for prolonged contact with water.

Handle Choice: Vandal-resistant lever or wrist blade handles with red & blue indexed handles.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION:

Two handle top-mount kitchen faucet shall feature cast brass construction with all brass coupling nuts. Shall feature tubular brass swivel spout with 8" reach. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model #6408.1__.002.

© 2016 AS America Inc. Revised 1/16




MONTERREY® TWO-HANDLE TOP-MOUNT KITCHEN FAUCET WITH TUBULAR BRASS SWIVEL SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B125.1 NSF 61/Section 9, Annex G CALGreen



		Finish
Product		Polished Chrome
Number	Description	002
6408.141	Top mount faucet with tubular brass swivel spout. VR lever handles. 1.5 gpm PCA aerator. With color matched spray.	
6408.140	Top mount faucet with tubular brass swivel spout. VR lever handles. 1.5 gpm PCA aerator. Less spray.	
6408.171	Top mount faucet with tubular brass swivel spout. VR wrist blade handles. 1.5 gpm PCA aerator. With color matched spray.	
6408.170	Top mount faucet with tubular brass swivel spout. VR wrist blade handles. 1.5 gpm PCA aerator. Less spray.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:		
Part Suffix	Description	
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet	
L15	1.5 gpm (5.7 Lpm) PCA Non-Aerated Laminar Flow Outlet	
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator	
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet	
L10	1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet	
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator	
V05	0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Non-Aerated Spray	
V035	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray	

*PCA - Pressure Compensating All modifications meet CALGreen Code

© 2016 AS America Inc.

Revised 1/16